

95.0020  
5/4/87

5        PROCESS AND APPARATUS FOR THE  
      SEMICONTINUOUS EXTRACTION OF NICOTINE FROM TOBACCO

Field of the Invention

This invention relates to extraction procedures and is particularly directed to an improved process for the extraction of nicotine from tobacco.

10      Background of the Invention

Various processes have been proposed for the removal of nicotine from tobacco. Most of these processes, however, adversely affect the desirable flavor and aroma properties of the tobacco or have  
15      been found to be limited in their scope and effectiveness. Also, they are often complex and expensive to carry out.

United States Patent No. 4,153,063  
(Roselius) discloses a process for removing nicotine  
20      from tobacco in which tobacco is contacted with an extraction solvent in a supercritical state. It discloses both a single step extraction process and a multi-step extraction process. In the single step extraction process, moist tobacco is extracted  
25      with a solvent in a supercritical state. Because aroma components are also removed along with nicotine in this single step extraction process, the multi-step process is suggested. In the first step, dry tobacco is extracted with a solvent in the supercritical

2026411102

state to remove the aroma components. In the second step, the tobacco is moistened and again extracted with a solvent in the supercritical state to remove nicotine. The nicotine is separated from the solvent  
5 by either evaporating the solvent, contacting the solvent in a separate vessel with an acid, or adsorbing the nicotine on an active carbon column. In the third step, the stored aroma components from the first step are redissolved in a supercritical solvent  
10 and returned to the tobacco. This multi-step extraction process is expensive and time consuming. In addition, the prolonged handling of the aroma components may adversely affect their properties.

United States Patent Application Serial  
15 No. \_\_\_\_\_, filed \_\_\_\_\_, continuation-in-part of United States Patent Application Serial No. 506,750, filed June 22, 1983, now abandoned, discloses a method for extracting caffeine from green coffee beans with a solvent in the supercritical  
20 state. Caffeine-free supercritical solvent is continuously fed into one end of an extraction vessel and caffeine-laden solvent is continuously discharged from the opposite end of the vessel. A portion of extracted beans is periodically discharged from the  
25 end of the vessel to which caffeine-free supercritical solvent is fed while simultaneously a portion of unextracted beans is charged to the end of the vessel from which caffeine-laden solvent is discharged. Caffeine is removed from the solvent by contacting  
30 the caffeine-laden solvent with a counter current liquid absorber. The caffeine-free solvent is then recycled to the extraction vessel.

#### Summary of the Invention

This invention provides an improved process  
35 for removing nicotine from tobacco. A nicotine-free

95.0020

2026411103

solvent in the supercritical state is fed into a first end of an extraction vessel<sup>SYSTEM</sup> containing tobacco and a nicotine-rich solvent is discharged from a second end of the extraction vessel<sup>SYSTEM</sup>. Periodically a  
5 portion of extracted tobacco is discharged from the first end of the extraction vessel<sup>SYSTEM</sup> while a portion of an unextracted tobacco is charged to the second end of the extraction vessel<sup>SYSTEM</sup>.

This invention also provides an improved  
10 process for removing nicotine from an extraction solvent. A nicotine-containing solvent in the supercritical state is fed into the first end of an entrapment vessel containing a nicotine entrapment material while a nicotine-free supercritical solvent  
15 is withdrawn from the second end of the entrapment vessel. Periodically a portion of spent entrapment material is discharged from the first end of the entrapment vessel while a portion of fresh entrapment material is charged to the second end of the entrap-  
20 ment vessel.

In one embodiment of this invention, a plurality of tobacco extraction vessels is connected in series. These extraction vessels are in turn connected to an entrapment vessel or a plurality of  
25 entrapment vessels which are also connected in series. Tobacco is extracted with a solvent either in the supercritical state or in the liquid state by continuously passing the nicotine-free solvent through one end of the plurality of extraction vessels connected  
30 in series and discharging the nicotine-enriched solvent from the opposite end. Thereafter the solvent, enriched in nicotine, is passed through an entrapment vessel or a plurality of entrapment vessels, connected in series, to remove the nicotine.  
35 The solvent, depleted in nicotine, is then recycled to the extraction vessel or vessels to again extract nicotine. Removal and addition of an extraction

VE SSG L  
SYSTEM  
EXTRACTION  
BATTERY

vessel from the system, or removal and addition of an entrapment vessel from the system, to provide continuous extraction or entrapment is accomplished by valve adjustment.

5           It is an object of this invention to provide a process for extracting nicotine from tobacco which is more efficient, provides a faster cycle time and results in lower capital and operating costs.

10           It is another object of this invention to provide a process for extracting nicotine from tobacco which increases the concentration of nicotine in the solvent and decreases the amount of solvent required per unit of tobacco.

15           It is still another object of this invention to provide a process for extracting nicotine from tobacco which requires less extraction solvent and thereby results in less degradation and loss of the aroma producing components and consequently gives an improved tobacco product.

20           It is another object of this invention to provide a process for extracting nicotine from tobacco which increases the amount of nicotine loaded on the nicotine entrapment material and significantly decreases the entrapment material to tobacco ratio.

25           It is a further object of this invention to provide a process for extracting nicotine from tobacco which results in a reduced CO<sub>2</sub> pressure drop, reduced tobacco bed compaction and a more favorable extraction bed geometry.

30           These and other objects and advantages of the invention may be seen in the following description.

#### Brief Description of the Drawing

35           FIG. 1 illustrates an apparatus for the semi-continuous extraction of nicotine from tobacco.

95.0020

2026411105

FIG. 2 illustrates an apparatus for the semi-continuous extraction of nicotine from tobacco and the semi-continuous entrapment of nicotine from the solvent.

5 Detailed Description of the Invention

An apparatus for the semi-continuous extraction of nicotine from tobacco is shown in FIG. 1. Extraction vessels 10 and 11 contain tobacco and are connected in series. The vessels as depicted are on  
10 stream (all radial flow<sup>or all axial</sup>) and are connected to entrapment vessel 15.

An extraction solvent is supplied to extraction vessel 10 which is connected to a pump 16. The pressure in the vessel is controlled by means of a  
15 fill pump (not shown) and the temperature is controlled by means of heat exchanger 17. The extraction solvent enters the top of extraction vessel 10, passes downwardly through the tobacco bed and leaves at the bottom of the vessel. In passing through the tobacco  
20 bed, the extraction solvent becomes enriched with nicotine from the tobacco. The solvent is then circulated to extraction vessel 11, again being introduced from the top, and then passing downwardly and exiting at the bottom. After exiting extraction vessel 11,  
25 the solvent is circulated to entrapment vessel 15. The extraction solvent enters the top of the vessel and then passes downwardly exiting at the bottom. In passing through the vessel, the nicotine in the solvent becomes trapped on the entrapment material.  
30 The solvent, depleted of nicotine, is then returned into the cycle by recirculating it to extraction vessel 10.

Extraction vessels 12, 13 and 14 are off stream and are in the turn around cycle. In the  
35 turn around cycle, extraction solvent is vented from

the extraction vessel, the extracted tobacco is unloaded, unextracted tobacco is loaded into the extraction vessel, and the extraction vessel is refilled with extraction solvent. Extraction vessels  
5 containing extracted tobacco are removed periodically from the end into which nicotine-free solvent is fed while simultaneously extraction vessels containing unextracted tobacco are added at the end from which nicotine-enriching solvent is discharged. Removal  
10 and addition of extraction vessels is accomplished by valve adjustment.

FIG. 2 illustrates an alternative embodiment wherein a plurality of extraction vessels, connected in series, is connected with a plurality of entrapment vessels, also connected in series. Extraction  
15 vessels 10 and 11 contain tobacco and are connected in series and are on stream (all radial<sup>OR AXIAL</sup> flow). Extraction vessels 12, 13 and 14 are off stream and in the turn around cycle. Entrapment vessels 20 and  
20 21 are connected in series and are on stream (all radial<sup>OR AXIAL</sup> flow).

As described for FIG. 1, extraction solvent is supplied to extraction vessel 10 and then circulated to extraction vessel 11. After exiting extrac-  
25 tion vessel 11, the solvent is circulated to entrapment vessel 20. The extraction solvent enters the top of the vessel and passes downwardly exiting at the bottom. The solvent is then circulated to entrapment vessel 21 again being introduced from the  
30 top, and passing downwardly exiting at the bottom. In passing through the vessels 20 and 21, the nicotine in the solvent becomes trapped on the entrapment material. The solvent, depleted of nicotine, is then returned into the cycle by recirculating it to  
35 extraction vessel 10.

Entrapment vessel 22 is off stream and in the turn around cycle. In the turn around cycle,

95.0020

2026411107

PAGE 5  
LINE 25

VESSEL 15 MAY BE A WATER COLUMN, OR AN ADSORBENT, I.E., ACTIVATED CARBON, ION EXCHANGE RESIN, OR AN ACIDIFIED AQUEOUS SOLUTION,

extraction solvent is vented from the entrapment vessel, the spent entrapment material unloaded, fresh entrapment material is loaded into the vessel and the vessel is refilled with extraction solvent.

- 5 Entrapment vessels containing spent entrapment material are removed periodically from the end in which nicotine-enriched solvent is fed while simultaneously entrapment vessels containing fresh entrapment material are added at the end from which  
10 nicotine-lean solvent is discharged. Removal and addition of entrapment vessels is accomplished by valve adjustment.

- In yet another embodiment of this invention, a plurality of entrapment vessels connected in series  
15 may be used to remove nicotine from a solvent in a process utilizing a single extraction vessel rather than a plurality of extraction vessels connected in series.

- A number of extraction solvents having  
20 solvent capacity for nicotine in both their liquid and gaseous phases can be employed to reduce the nicotine content of tobacco. Carbon dioxide in the supercritical state is the preferred solvent in this invention. Other useful solvents include, for  
25 example, halogenated hydrocarbons including up to about 4 carbon atoms such as  $\text{CF}_4$ ,  $\text{CHF}_3\text{CClF}_3$ ,  $\text{CBrF}_3$ ,  $\text{CF}_2=\text{CH}_2$ ,  $\text{CF}_3-\text{CF}_2\text{CF}_3$ ,  $\text{CHClF}_2$ ,  $\text{CCl}_2\text{F}_2$ ,  $\text{CHCl}_2\text{F}$ ,  $\text{CCl}_3\text{F}$ ,  $\text{CBrF}_3$ ,  $\text{CFCl}=\text{CF}_2$ ,  $\text{CH}_3-\text{CF}_3$ , octafluorocyclobutane and hydrocarbons including up to about 5 carbon atoms  
30 such as propane, butane, pentane; other useful solvents include  $\text{N}_2\text{O}$ ,  $\text{SF}_6$  and argon. Mixtures of solvents or additives or co-solvents may be used to obtain improved solvent characteristics.

- Supercritical carbon dioxide is carbon  
35 dioxide which is above its critical temperature, i.e., above  $31.3^\circ\text{C}$ . and above its critical pressure, i.e., above about 70 atmospheres. Extraction with

95.0020

2026411108

carbon dioxide in the supercritical state is carried out at a pressure in the range of from about 70 to about 1500 atmospheres and at a temperature in the range of from above the critical temperature to about 120°C. The range of temperature and pressure for the supercritical state of other useful solvents are of generally the same order of magnitude.

The entrapment material in the entrapment vessel may be an adsorbent with an affinity for nicotine. Such adsorbents include activated carbon, silica, alumina, magnesium silicate and ion exchange resins. The adsorbent may also be mixed with a diatomaceous earth, up to a ratio of about 1:1, to improve the flow rate of the adsorbent.

Alternatively, the entrapment material in the entrapment vessel may be an absorbent which has an affinity for nicotine. Absorbents are preferred over adsorbents. Such absorbents include water, acid, and salt solutions.

The preferred acids for use as an entrapment material in this invention are generally the same as those disclosed in United States Patent Application Ser. No. 947,102, filed December 29, 1986 and assigned to Philip Morris Incorporated. The preferred acids are non-volatile and non-soluble in the solvent under the conditions of the extraction. Useful acids are sulfuric, phosphoric and nitric. Other useful acids are the polycarboxylic acids such as tartaric, citric, malic, lactic, malonic, succinic, and glutamic.

Monovalent salts of the above acids such as the alkali salts are generally preferred because these salts are less volatile and less soluble in the solvent. A preferred salt of an acid is monopotassium citric acid. Monoammonium and diammonium salts of the above acids may also be used. Polyvalent salts of the above acids are also useful but are less efficient in trapping nicotine.



The extraction process may be carried out on tobacco which has or has not been premoistened. It is generally preferred to moisten the tobacco up to about 25% OV (oven volatiles).

In a typical semi-continuous extraction and entrapment, as illustrated in FIG. 2, the cycle time for extraction vessel 10 was 1 hour and the total extraction was 2 hours. Turn around time for the extraction vessel was 3 hours. Cycle time for entrapment vessel 15 was 3 hours and the total entrapment (adsorption/absorption) time was 6 hours. Turn around time for an entrapment vessel was 3 hours.

Table 1 shows a comparison of nicotine concentration in supercritical carbon dioxide in a batch extraction versus a semicontinuous extraction. The amount of nicotine removed from the tobacco is shown, on a dry weight basis (dwb). The average nicotine concentration in the carbon dioxide increased from ~~100~~ PPM in a batch extraction to ~~127~~ PPM in a semi-continuous extraction which resulted in a decrease of ~~17.62%~~ in the carbon dioxide/tobacco ratio. *from 300/1 to 168/1, or 44% reduction,*

Table 1

COMPARISON OF  
BATCH vs. SEMICONTINUOUS EXTRACTION

EXTRACTION TIME (hrs)	NICOTINE IN TOBACCO (%)	NICOTINE REMOVED, (dwb) (g/100g)	NICOTINE CONC. IN CO <sub>2</sub> (ppm) <sup>2</sup>
			<u>BATCH</u> <u>SEMI-CONTINUOUS</u>
0	100	0	0
0.5	35	0.955	127
1.0	86.8	0.331	107
1.5	4.6	0.116	16
2.0	2.7	0.043	13
		1.445 (total)	4860 (avg)
			127 (avg)

0	100	0	-	-
1.0	86.8	1.605	107	107
2.0	2.7	0.195	13	107
		1.80	60	107
		(TOTAL)	(AVG.)	(AVG.)

Table 2 shows a comparison of the carbon to tobacco ratio, on a dry weight basis (dwb), in a ~~batch extraction-entrapment~~, a ~~batch extraction-semi-continuous extraction~~, a ~~semi-continuous extraction-entrapment~~, and a ~~semi-continuous extraction-entrapment~~. The carbon to tobacco ratio dropped from ~~2.95~~ <sup>4.0</sup> in a batch ~~extraction~~ <sup>extraction/entrapment</sup> to ~~2.0~~ <sup>2.0</sup> in a semi-continuous ~~extraction~~ <sup>entrapment</sup>, which represented a decrease of ~~37%~~ <sup>50%</sup> in the carbon to tobacco ratio. The estimated carbon to tobacco ratio in the semi-continuous extraction and entrapment was ~~in the~~ <sup>significantly</sup> below 2.0 <sup>below 2.0</sup> (in the range of 0.4 to 0.8) which even when calculated from 0.8 still represents a decrease of ~~27%~~ <sup>80%</sup> in the carbon to tobacco ratio when compared with the batch ~~extraction~~ <sup>entrapment</sup> and a decrease of ~~73%~~ <sup>80%</sup> when compared with the semi-continuous extraction.

15

Table 2

Carbon/Tobacco Ratio (dwb)		
Batch Extraction/	Batch Adsorption	2.95 4
Batch Extraction/	Semi Continuous Entrapment	2
Semicontinuous Extraction		1.1
Semicontinuous Extraction/	Semi	0.4 - 0.8
continuous and Entrapment		(estimated)

LESS THAN 2  
(0.4 - 0.8 ESTIMATED)

Table 3 shows a comparison of design features between a batch extraction and a semi-continuous extraction and entrapment. <sup>Raw</sup> tobacco having a nicotine content of 1.85% <sup>dwb</sup> and an oven volatile (OV) content of 25% is shown extracted with carbon dioxide under supercritical conditions at 260 atmospheres and 70°C using carbon as the entrapment material. After extraction, the tobacco had a nicotine content of 0.05%.

uncured? green? Full flavor or Starting tobacco.

The number and size of the vessels required in a semi-continuous system are smaller than in a batch system resulting in reduced turn around time. In addition, the number of CO<sub>2</sub> circulation pumps, the size of the CO<sub>2</sub> storage vessels and the size of the CO<sub>2</sub> handling system (fill pump, compressor) are

95.0020

2026411111

smaller. Only one heat exchanger, one recovery cooler-condensor and one dust filter are needed. The average nicotine concentration in the super-critical CO<sub>2</sub> was higher, which resulted in a lower value for the CO<sub>2</sub> to tobacco ratio and a lower value for the entrapment material to tobacco ratio. In addition, because the system runs semi-continuously, equipment reliability is better and adaptability of the system to a liquid wash process is easier.

95.0020

2026411112

2026411113

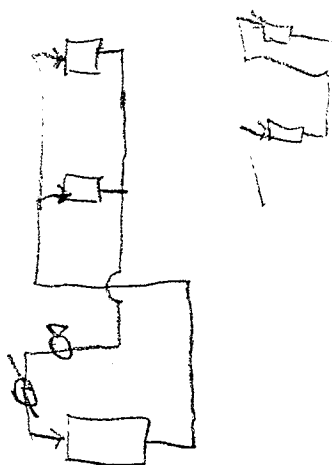


Table 3

		BATCH DESIGN (4 UNITS)	SEMI-CONTINUOUS DESIGN EXTRACTION/ENTRAPMENT (4 UNIT EQUIV.)
5	cycle time	5 hrs	1 hr. extraction, 3 hrs. adsorption
	extraction time	2 hrs	2 hrs
	turn around time	3 hrs	3 hrs
	CO <sub>2</sub> /tob. ratio	300	168
10	carbon/tob. ratio	2	< 2
	CO <sub>2</sub> flow	0.681 MM lbs/hr per unit or 2.724 MM lbs/hr total for 4 units	0.611 MM lbs/hr total
<u>EXTRACTION VESSELS:</u>			
	NO. OF VESSELS	4	5
15	"TOTAL" TOB. CHARGE, LBS. (dwb)	18,168	18,168
	PER VESSEL TOB. CHARGE, LBS. (dwb)	4,542	3,634
PER	PER VESSEL TOB. VOLUME, FT <sup>3</sup>	458	366
	NOMINAL VESSEL VOLUME, FT <sup>3</sup>	2,765	640
	NOMINAL VOLUME SIZE, FT	8D X 55H	4.5D X 40H
20	<u>ENTRAPMENT VESSELS:</u>		
	NO. OF VESSELS	8	3
	"TOTAL" CARBON CHARGE, LBS.	72,672	< 65,600
	PER VESSEL CARBON CHARGE, LBS.	9,084	< 21,870
	PER VESSEL CARBON VOLUME, FT <sup>3</sup>	364	< 875
25	NOMINAL VESSEL VOLUME, FT <sup>3</sup>	804	TBD
<u>NICOTINE:</u>			
	LOADING ON CARBON, %	0.9	0.9+
	LBS. REMOVED/CHARGE	328	65.6
	CO <sub>2</sub> FLOW M LBS/HR	2.724	0.611
30	AVE. NICO. CONC. IN CO <sub>2</sub>	60	107
	CO <sub>2</sub> /TOB. RATIO	300	168
	TOTAL NO. OF PRESS. VESSELS	12	8

The following example is illustrative.

Eight pressure vessels were arranged for series extraction as shown in FIG. 2. The extraction vessels (10 through 14) were large enough to hold 4845 lbs. ~~24,224 lbs.~~ of tobacco each at 25%OV (i.e., 366 cu.ft. of tobacco). The entrapment vessels (20 through 22) were large enough to hold 21,870 lbs. of activated carbon (i.e., 875 cu.ft. of carbon volume).

95.0020

✓ Check these numbers please - they do not seem to add up, i.e., 1 cu.ft. tobacco ~ 3 1/2 - 4 lbs X  
I have added the per vessel tobacco charge (4845 lbs at 25%OV, 3634 lbs DWB)

202641114

define 5 Dry carbon (how much?) was loaded into each entrapment vessel (20, 21, 22). A blend of full flavor tobacco was moistened from 12%OV to 25%OV by direct spray of deionized water in a rotating cylinder. About 24,224 lbs. of premoistened tobacco (i.e., 18,168 lbs. dwb) was loaded into each extraction vessel (10, 11, 12, 13, 14).

#### Start-Up

10 A CO<sub>2</sub> fill pump was used to pressurize vessels 10 and 20. Carbon dioxide was circulated through the two vessels at the rate of 611,000 lbs/hr. After extraction conditions were reached, i.e., 260 atmospheres, 70°C, the circulation of CO<sub>2</sub> was continued through vessels 10 and 20 for one hour.

15 Vessels 11 and 21 were pressurized with CO<sub>2</sub> during this first hour.

20 In the second hour of extraction, the flow of CO<sub>2</sub> was directed through vessels 10, 11, 20 and 21 as shown in FIG. 2. Vessel 12 was pressurized with CO<sub>2</sub> during this second hour.

In the third hour of operation, the flow of CO<sub>2</sub> was directed through vessels 11, 12, 20 and 21.

25 Also in the third hour of operation, extraction vessel 10 was removed from the extraction loop and subjected to the turn-around phase. The CO<sub>2</sub> in vessel 10 was vented and the extracted tobacco was unloaded. Vessel 10 was again filled with tobacco and CO<sub>2</sub>, and was ready to be returned to the extraction loop. The turn-around phase for an extraction vessel

30 takes 3 hours.

In the fourth hour of operation, vessel 12 was added to the extraction loop and vessel 11 was removed and was subjected to the turn around phase.

35 Also in the fourth hour of operation, the flow of CO<sub>2</sub> was directed through entrapment vessels 21 and 22. Entrapment vessel 20 was subjected to the

95.0020

2026411115

turn-around phase. The CO<sub>2</sub> in vessel 20 was vented and the spent carbon was unloaded. Vessel 20 was again filled with carbon and CO<sub>2</sub>, and <sup>it</sup> was ready to be returned into the extraction loop. The turn-around  
5 phase for an entrapment vessel takes 3 hours.

Steady state conditions were reached in six hours. Vessel 10 was returned to the extraction loop in the 6th hour of operation (Table 4). Extrac-  
tion vessels 11, 12, 13 and 14 were each similarly  
10 subjected to the turn-around phase and then returned to the extraction loop.

#### Continuous Operation

As shown in FIG. 2 and Table 4, one batch of extracted tobacco was produced every hour. The  
15 nicotine content in the tobacco was reduced 97%, from 1.85% nicotine (dwb) to 0.05% nicotine (dwb). The total extraction time was two hours. The solvent to tobacco ratio was 168 parts of CO<sub>2</sub> to one part of tobacco (dwb). This solvent to tobacco ratio was  
20 significantly lower than the 300 parts of CO<sub>2</sub> to one part of tobacco (dwb) required in a batch system.

As shown in Table 5, it was found that the continuous operation increases the concentration of nicotine in the CO<sub>2</sub> solvent without significantly  
25 increasing the concentration of other tobacco soluble materials (considered to be important for product quality) in the CO<sub>2</sub> solvent.

Expert evaluation showed that cigarettes made from extracted tobacco, where the solvent to  
30 tobacco ratio was low, were of higher subjective quality than cigarettes made from extracted tobacco where the solvent to tobacco ratio was high.

Table 4

Time (Hr.)	CO <sub>2</sub> Flow Arrangement (1)		Vessels in Turn-around Phase (2)
	Extraction Vessels	Entrapment Vessels	
5	Start-up:		
	1	10	
	2	10, 11	
	3	11, <del>14</del> 12	20, 21
	4	<del>12, 14, 13</del> 13	20, 21
	5	13, <del>12</del> 14	10
10	6	<del>14</del> 12, 10	10, 11, 20
			10, 11, <del>14</del> 12, 20
			11, <del>14, 13</del> 12, 13, 20
	Continuous Steady State Operation:		
	7	10, 11	22, <del>21</del> 20
	8	11, <del>14</del> 12	<del>14, 13, 12, 21</del> → 12, 13, 14, 21
	9	<del>12, 14, 13</del>	<del>22, 21</del> 20
15	10	13, <del>12</del> 14	<del>13, 12, 10, 21</del> → 13, 14, 10, 21
	11	<del>14</del> 12, 10	<del>12, 10, 11, 21</del> → 14, 10, 11, 21
	12	10, 11	<del>10, 11, 14, 23</del> → 10, 11, 12, 22
	13	11, <del>14</del> 12	<del>11, 14, 13, 23</del> → 11, 12, 13, 22
	14	<del>12, 14, 13</del>	<del>14, 13, 12, 23</del> → 12, 13, 14, 22
20	15		<del>13, 12, 10, 22</del> → 13, 14, 10, 20
			<del>12, 10, 11, 22</del> → 14, 10, 11, 20
		-----Continuous Operation-----	

Note:

- 1 - CO<sub>2</sub> flow maintained at 611,000 lb/hr through vessels indicated.
- 25 2 - Turn-around time was 3 hours. Turn-around time (TAT) included the following steps.

- CO<sub>2</sub> vent
- Tobacco or activated carbon unloading
- Tobacco or activated carbon loading
- 30 CO<sub>2</sub> fill to extraction conditions  
(260 atmospheres, 70°C)



Table 5

		<u>Batch Operation</u>	<u>Continuous Operation</u>
	<u>% Nicotine in Tobacco (dwb)</u>		
5	Unextracted	1.85	1.85
	Extracted	0.05	0.05
	<u>Solvent/Tobacco Ratio (dwb)</u>	300	168
	<u>Solubles in CO<sub>2</sub> (ppm)</u>		
10	Nicotine	60	107
	Other Tobacco Solubles	60-120	60-120
	<u>% Solubles Removed from Tobacco (dwb)</u>		
	Nicotine	1.8	1.8
	Other Solubles	1.8-3.6	1.0-2.0

95.0020

2026411118

I claim:

1. A method for the solvent extraction of nicotine from tobacco which comprises:

- 5 (a) feeding a nicotine-free solvent to a first end of an extraction vessel containing tobacco and withdrawing a nicotine-rich solvent from a second end of the extraction vessel;
- (b) periodically discharging a portion of extracted tobacco from the first end of the extrac-
- 10 tion vessel; and
- (c) charging a portion of unextracted tobacco to the second end of the extraction vessel.

2. The method according to claim 1 wherein the solvent is in the supercritical state.

15 3. The method according to claim 1 wherein the solvent is in the liquid state.

4. The method according to claim 2 or 3 wherein the moisture content of the tobacco is up to about 30% by weight.

20 5. The method according to claim 2 or 3 wherein the extraction solvent is carbon dioxide.

6. The method according to claim 2, 3 or 4 wherein the extraction solvent is selected from the group comprising argon,  $\text{SF}_6$ ,  $\text{N}_2\text{O}$ , a lower hydrocarbon

25 and a lower halogenated hydrocarbon.

7. The method according to claim 2 or 3 wherein the extraction process is carried out in a plurality of extraction vessels connected in series.

95.0020

2026411119

8. A method of separating nicotine from a solvent in the supercritical state which comprises:

- (a) feeding a nicotine-containing supercritical solvent to a first end of an entrapment vessel containing a nicotine entrapment material and withdrawing a nicotine-free supercritical solvent from a second end of the entrapment vessel;
- (b) periodically discharging a portion of spent entrapment material from the first end of the entrapment vessel; and
- (c) charging a portion of fresh entrapment material to the second end of the entrapment vessel.

9. The method according to claim 8 wherein the entrapment material is an adsorbent selected from the group consisting of carbon, silicon, alumina, magnesium silicate and ion exchange resins.

10. The method according to claim 8 wherein the entrapment material is an absorbent selected from the group consisting of water, acid and salt solutions.

11. The method according to claim 9 wherein the entrapment material is carbon.

12. The method according to claim 10 wherein the entrapment material is monopotassium citric acid.

13. The method according to claim 8 wherein the entrapment process is carried out in a plurality of entrapment vessels connected in series.

14. A method for the extraction of nicotine from tobacco which comprises:

- (a) feeding a nicotine-free supercritical solvent to a first end of an extraction vessel containing tobacco and withdrawing a nicotine-containing supercritical solvent from a second end of the extraction vessel;
- (b) periodically discharging a portion of extracted tobacco from the first end of the extraction vessel;
- (c) charging a portion of unextracted tobacco to the second end of the extraction vessel;
- (d) feeding a nicotine-containing supercritical solvent to the first end of an entrapment vessel containing a nicotine entrapment material and withdrawing a nicotine-free supercritical solvent from the second end of the entrapment vessel;
- (e) periodically discharging a portion of spent entrapment material from the first end of the entrapment vessel; and
- (f) charging a portion of fresh entrapment material to the second end of the entrapment vessel.

15. The method according to claim 14 wherein the moisture content of the tobacco is up to about 30% by weight.

16. The method according to claim 14 or 15 wherein the extraction solvent is carbon dioxide.

17. The method according to claim 14 wherein the entrapment material is carbon.

18. The method according to claim 14 wherein the entrapment material is monopotassium citric acid.

19. The method according to claim 14  
5 wherein the extraction process is carried out in a plurality of extraction vessels connected in series.

20. The method according to claim 14 wherein the entrapment process is carried out in a plurality of entrapment vessels connected in series.

10 21. An apparatus for the extraction of nicotine from tobacco with a solvent in the supercritical state or in the liquid state which comprises a plurality of extraction vessels connected in series.

22. The apparatus according to claim 21  
15 wherein the extraction solvent is carbon dioxide.

23. An apparatus for the removal of nicotine from a solvent in the supercritical state or in the liquid state which comprises a plurality of entrapment vessels connected in series.

20 24. The apparatus according to claim 23 wherein the extraction solvent is carbon dioxide.

PROCESS AND APPARATUS FOR THE SEMICONTINUOUS  
EXTRACTION OF NICOTINE FROM TOBACCO

Abstract of the Disclosure

5 A process is provided for the improved  
removal of nicotine from tobacco. A nicotine-free  
solvent in the supercritical state is fed into a  
first end of an extraction vessel containing tobacco  
and a nicotine-rich solvent is discharged from a  
second end of the extraction vessel. Periodically a  
10 portion of extracted tobacco is discharged from the  
first end of the extraction vessel while simultan-  
eously a portion of an unextracted tobacco is charged  
to the second end of the extraction vessel.

95.0020

2026411123

DECLARATION AND POWER OF ATTORNEY

I, Ravi Prasad, declare that I am a citizen  
of the United States of America, residing and having  
5 a post office address at 108-21 Henshaw Drive, Midlothian,  
Virginia 23110;

that I verily believe myself to be the  
original, first and sole inventor of the invention  
or discovery in:

10       PROCESS AND APPARATUS FOR THE SEMICONTINUOUS  
          EXTRACTION OF NICOTINE FROM TOBACCO

which is described and claimed in the attached speci-  
fication;

15       that I have read and do understand the  
content of said specification, including the claims,  
and knowledge and duty to disclose information, of  
which I am aware, which is material to the examina-  
tion of this application in accordance with Title 37,  
Code of Federal Regulations, § 1.56(a);

20       that I do not know and do not believe  
that this invention or discovery was ever known or  
used in the United States of America before my inven-  
tion or discovery thereof, or patented or described  
in any printed publication in any country before my  
25 invention or discovery thereof, or more than one  
year prior to this application; or in public use or  
on sale in the United States of America more than  
one year prior to this application; that this inven-  
tion or discovery has not been patented or made the  
30 subject of an inventor's certificate issued before  
the date of this application in any country foreign  
to the United States of America on an application  
filed by me or my legal representatives or assigns  
more than twelve months prior to this application;

and that no application for patent or inventor's certificate on this invention or discovery has been filed in any country foreign to the United States of America by me or my legal representatives or assigns;

5           and I hereby appoint Arthur I. Palmer, Jr., Esq., Reg. No. 18,855, James E. Schardt, Esq., Reg. No. 23,033, Albert E. Fey, Esq., Reg. No. 19,018 and W. Edward Bailey, Esq., Reg. No. 30,994, my attorneys, with power of substitution, and with power of appointment of associate attorneys, and of revocation of  
10           their powers, to prosecute this application and any divisions, continuations in whole or in part, renewals and reissues of the same, and to transact all business in the Patent and Trademark Office connected therewith;  
15           and I request that communications be sent to:

                                W. Edward Bailey  
                                c/o Fish & Neave  
                                875 Third Avenue  
20                               New York, New York 10022-6250

and that telephone calls be directed to:

                                W. Edward Bailey  
                                (212) 715-0600.

Wherefore, I pray that Letters Patent be  
25           granted to me for the invention or discovery described and claimed in the attached specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, and power of attorney.

30           I declare, further, that I understand the English language and that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and, further, that these statements were  
35           made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18

95.0020

202641125



of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

5

\_\_\_\_\_  
Date

\_\_\_\_\_  
Ravi Prasad

95.0020

2026411126